

REGUPOL®

KOMBI™

Multipurpose Performance Surface Combination





REGUPOL® Kombi

BALL
REBOUND

98%

FORCE
REDUCTION

21%

ENERGY
RESTITUTION
70%



Precision performance for sports and training.

Regupol Kombi multipurpose sports surfaces are the perfect solution for facilities that host demanding ball sports, running and training. Kombi is manufactured using a proprietary process that ensures consistent density, thickness, and resilience – for uniform ball rebound, shock absorption, and elasticity.



Product Specifications



Product Form

Standard Thickness: 5/16" (8mm)

Weight: 1.55 lbs./sq.ft.

Standard Width: 48"

Standard Colors: Brick Red, Green, Light Gray


Custom Colors, Thicknesses and Widths: Available upon request (minimums apply). Allow extra lead time.

Product Performance Data

Density	ASTM D3676	Cushion Layer-45 lbs./cu.ft., Wear Layer-79lbs./cu.ft.
Hardness	ASTM D2240 (Shore A)	55
Force Reduction	DIN 18032-2	21%
Ball Rebound	DIN 18032-2	98%
Vertical Deformation	DIN 18032-2	1.31
Sliding Behavior	DIN 18032-2	Dry -1.07, Wet -.74
Residual Indentation	ASTM F970	0.006 at 250 psi
Abrasion Resistance	ASTM F1344 1000 cycles	0.73 grams loss



KO101 Brick Red

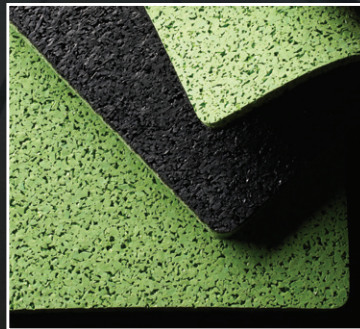

KO102 Green



KO103 Light Gray



Please feel free to contact us:

Phone +1800.537.8737

Email sales@regupol.com